

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN	372	3p

Fig. 1A


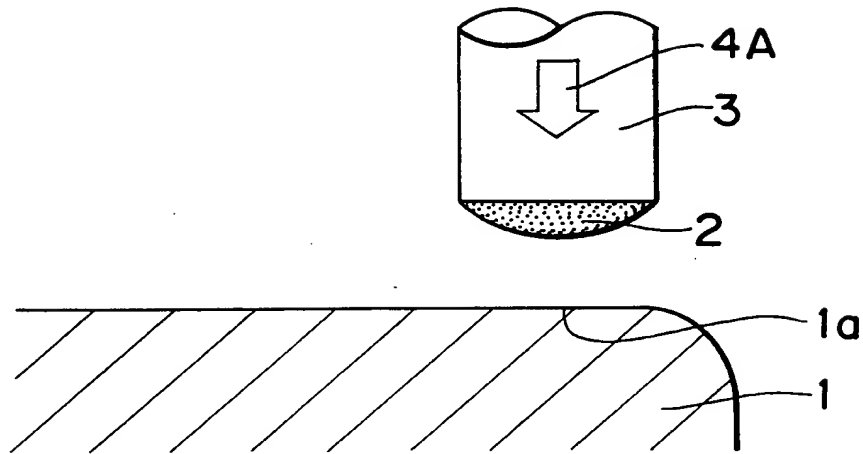


Fig. 1B

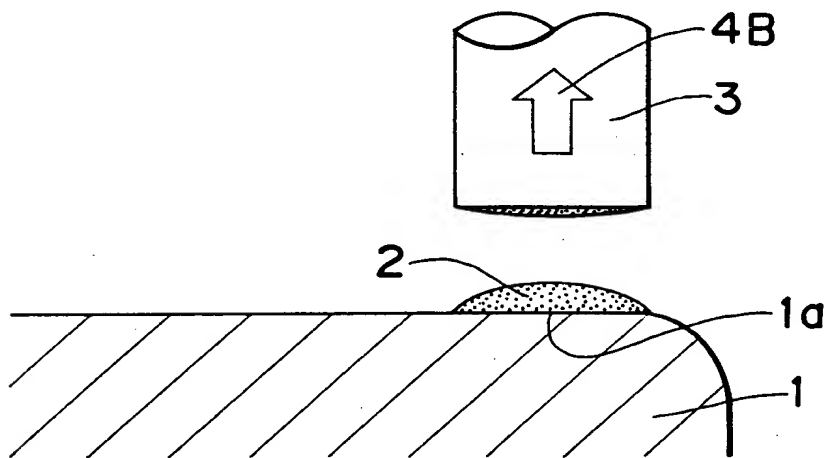

102220 " 2262260

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig. 2A

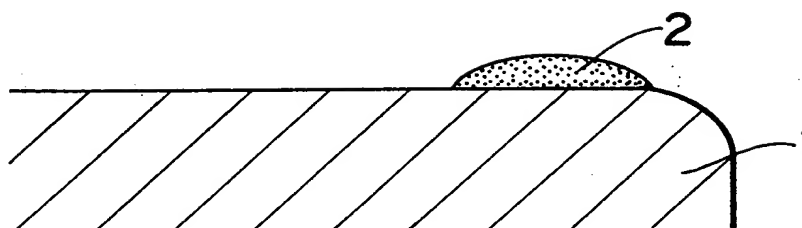


Fig. 2B



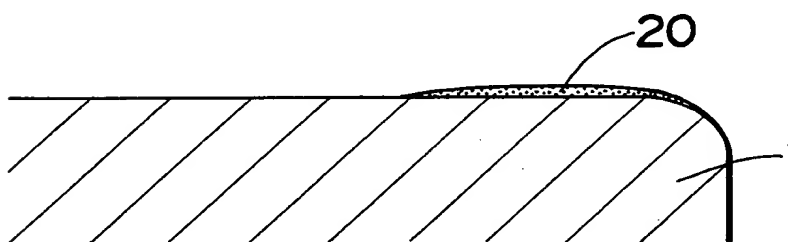


Fig. 3

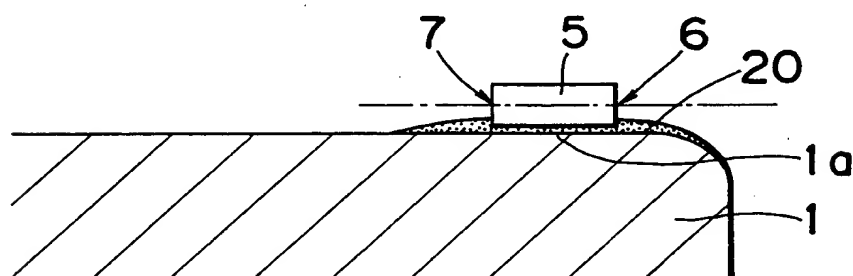

APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

Fig. 4

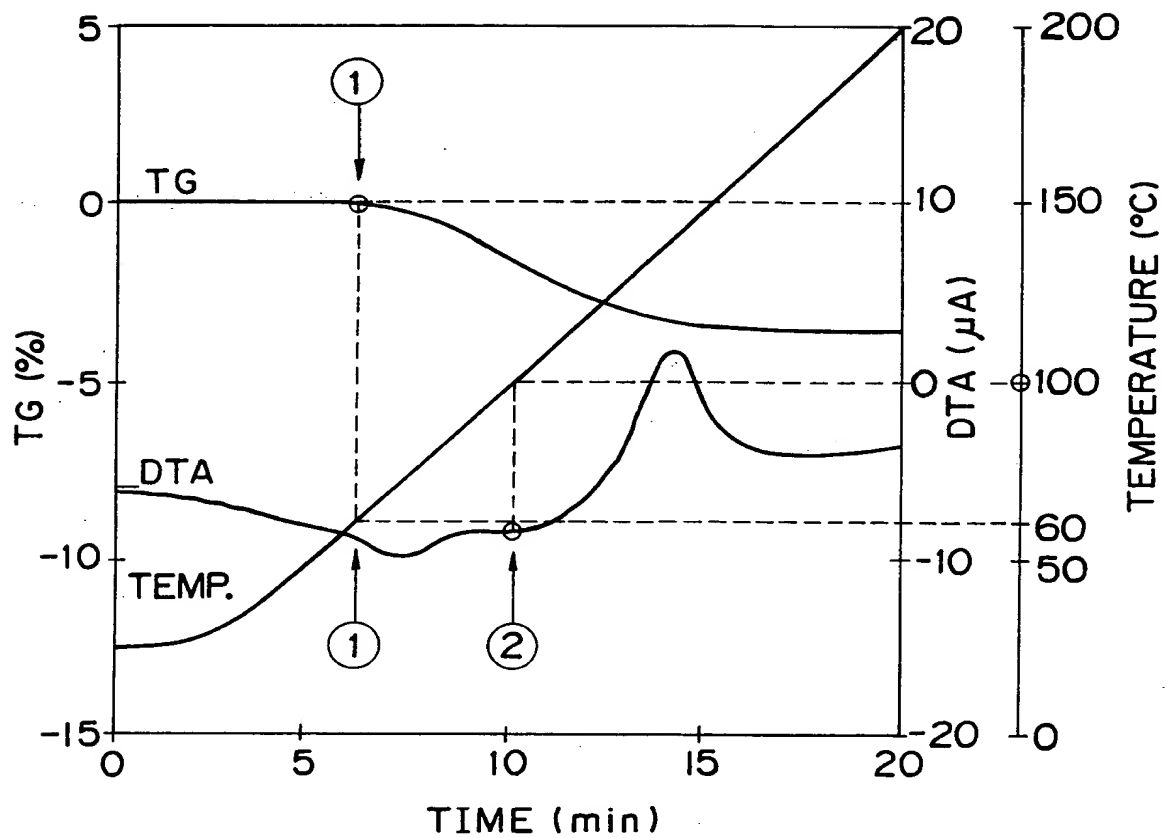

- ①: POINT AT WHICH DILUENT STARTS TO TRANSPIRE (60 °C)
- ②: POINT AT WHICH RESIN STARTS THERMO SETTING REACTION (100 °C)

Fig.5 PRIOR ART

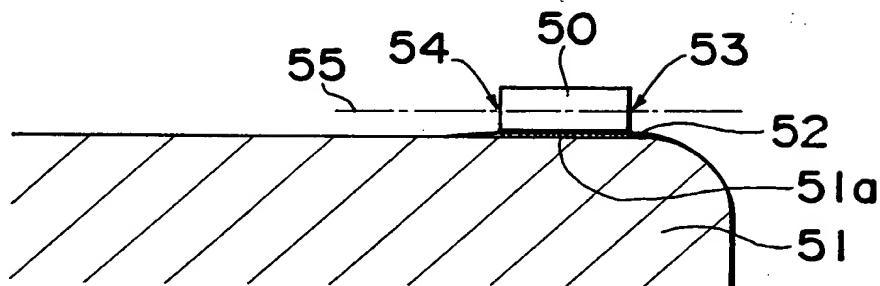


Fig.6 PRIOR ART

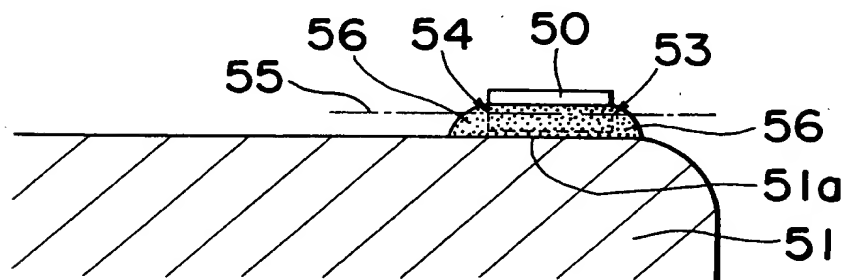


FIG. 5 PRIOR ART

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig. 7A PRIOR ART

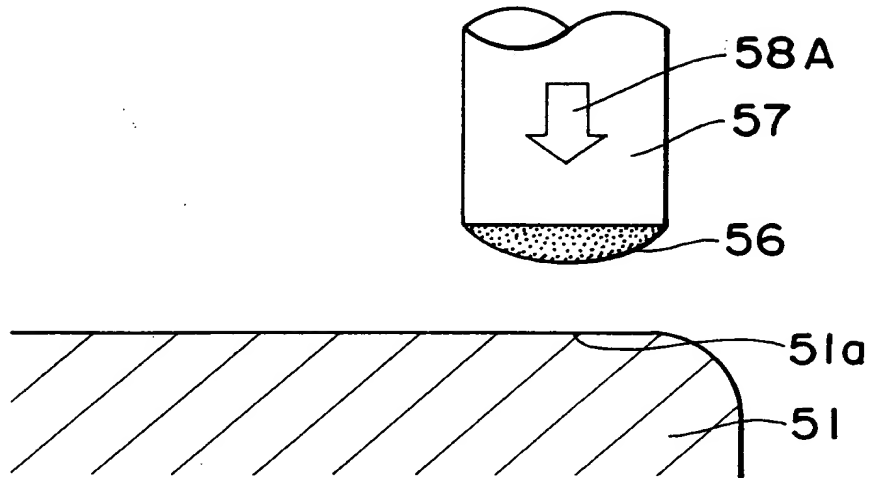


Fig. 7B PRIOR ART

